



10793 State Route 37 W. | Sunbury, OH 43074
Toll Free: 877-4BRYAIR (877-427-9247)
Phone: 740-965-2974 | **Fax:** 740-965-5470
E-Mail: bryair1@bry-air.com
Web: www.bry-air.com

Bry-Air (Asia) Pvt. Ltd.


21C, Sector-18,
Gurgaon-122015, India
Phone: 91-124-8991111
Fax: 91-124-8991100
E-Mail: enquire@pahwa.com
Web: www.bryair.com

Bry-Air (Malaysia) Sdn. Bhd.

(197712-W) Lot 11 Jalan
P/7, Bangi Industrial Estate
43650 Bandar Baru Bangi,
Selangor-Malaysia
Phone: 60-3-89256622
Fax: 60-3-89259957
E-Mail: bam@bryair.com.my
Web: www.bryair.com.my

Bry-Air (Brazil)

TCA-Somax/Divisao Bry-Air
Rua do reijao, no. 601
Mercado Sao Sebastiao
Rio de Janeiro – RJ
Brazil – 21022-050
Phone: 55 21 2584-6549
Fax: 55 21 2584-2457
E-Mail: tcasomax@tcasomax.com.br
Web: www.tcasomax.com.br

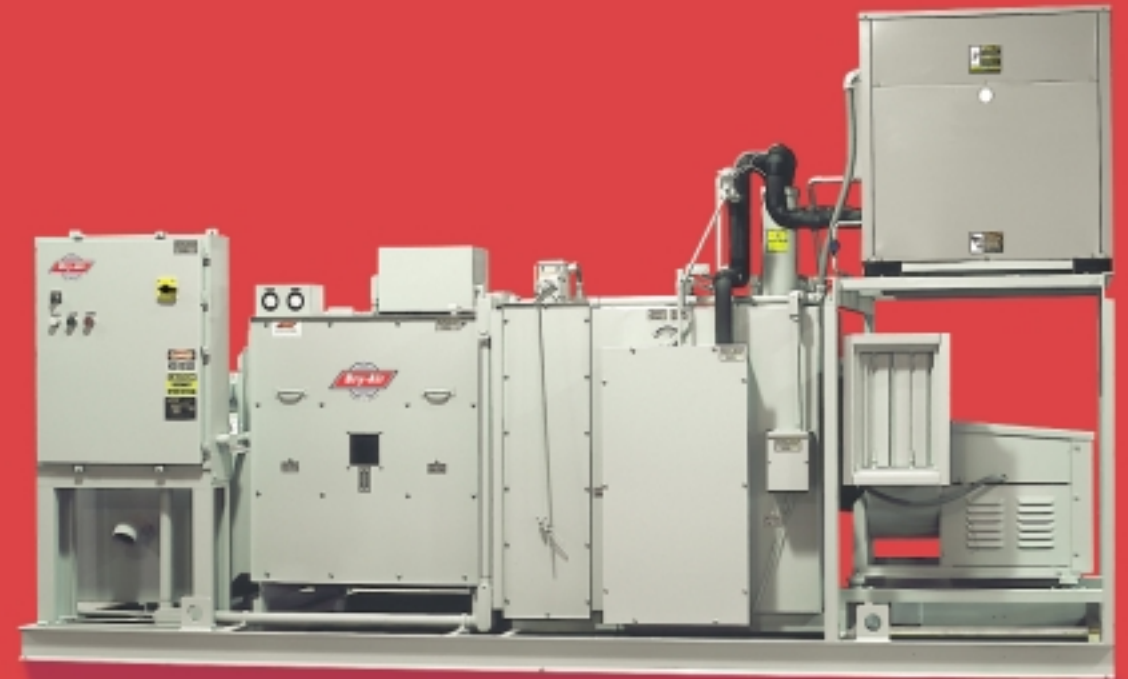

VFB

New and Improved



At *Bry-Air*, we realize that some dehumidification specifications require a truly custom creation.

That's why we offer the **new and improved VFB**. This proven unit has been upgraded to more effectively meet your particular temperature and humidity needs.

Bry-Air has been designing and building complete package units for more than 30 years. When a standard modular unit simply won't do, put *Bry-Air's* experience to work for you.


VFB Characteristics:

Standard Features:

- Desiccant rotor manufactured in a Bry-Air, ISO certified facility - **New!**
- 45% efficiency inlet filters - **New!**
- Hinged filter access doors with quick release fasteners - **New!**
- Circuit breakers (not fuses) for over-current protection - **New!**
- Relay-based controls for simple, reliable operation
- Electric, LP or natural gas, or steam reactivation

Optional Features:

- Pre and after cooling coils of various configurations and materials for use with all standard brines and refrigerants
- DX condensing units and chillers
- Pre-piped and wired condensing units
- Removable 3" double-sloped stainless steel drain pan - **New!**
- Pre and after heating
- Humidification
- Purge section for low dew point applications
- Various P.I.D. and PLC control schemes
- 65%, 95% efficiency or HEPA filters
- Variable frequency drives

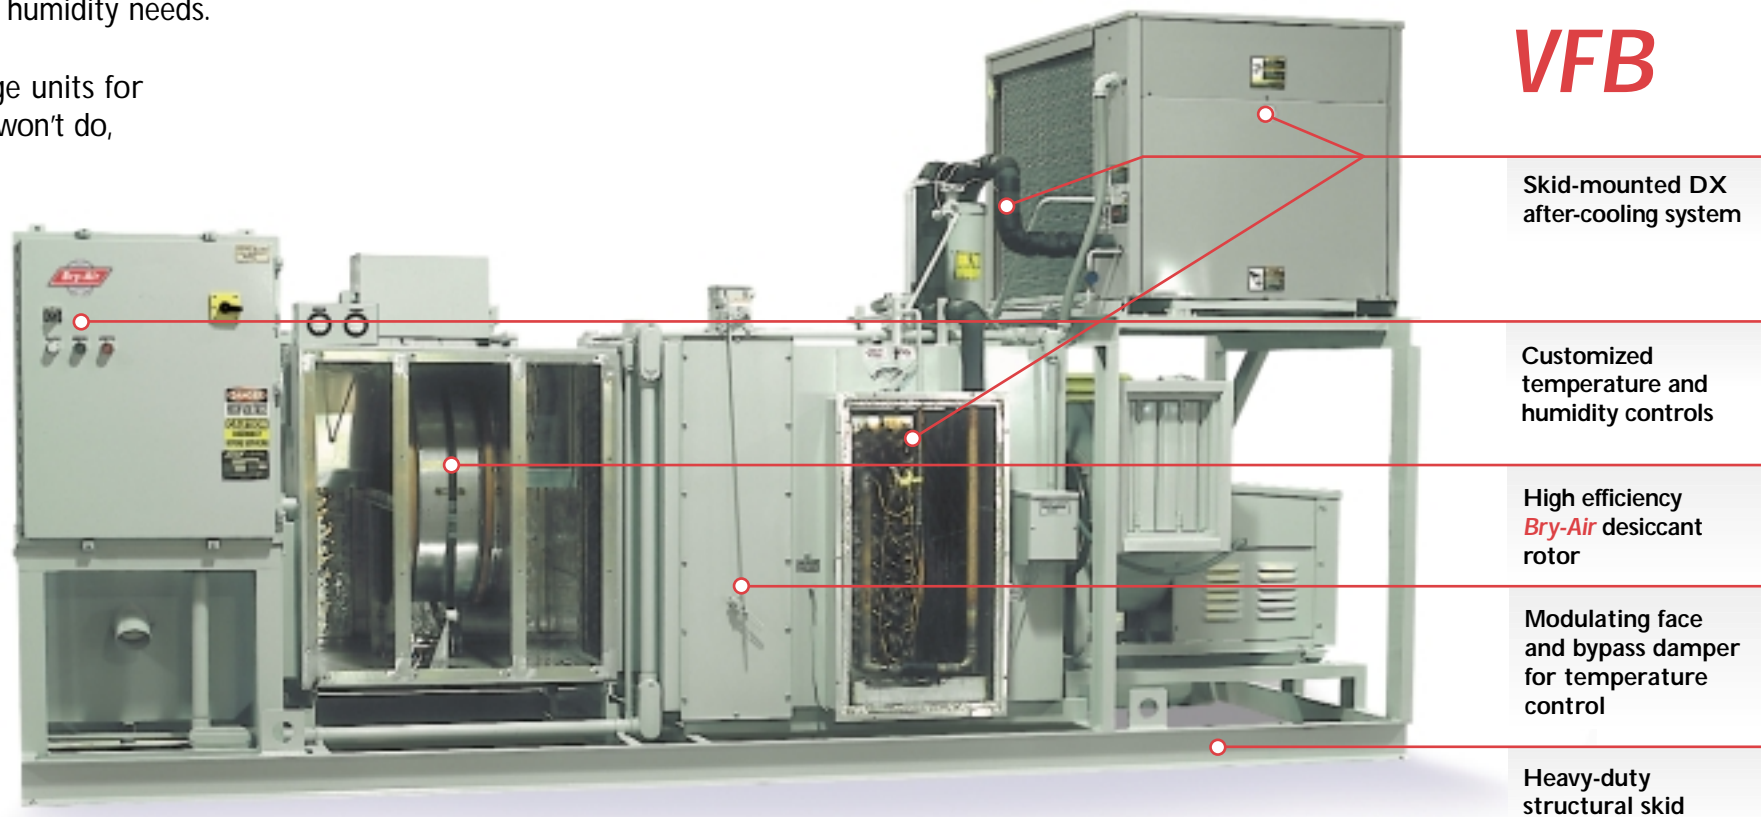

Whether designed as a stand-alone unit or a complete package system, the **VFB** will meet your exact requirements.

With **VFB** you will get:

- Solid welded aluminum construction
- Rugged construction suitable for portable applications
- 12 dehumidifier sizes from 600 – 30,000 CFM
- Total system airflows of 50,000 CFM or more
- A unit capable of delivering air to -60°F dew point
- Proven technology and performance
- Easy maintenance
- A machine built to last
- 24/7 technical support

Contact Bry-Air for specification and pricing information.

